



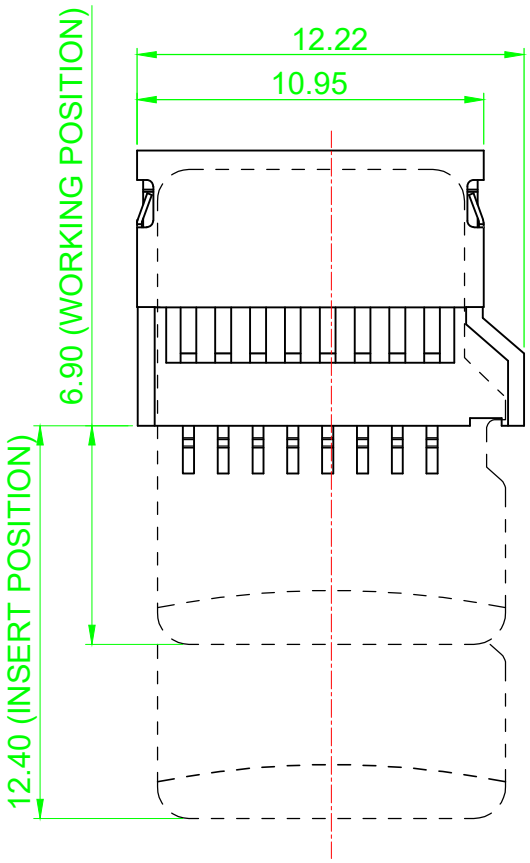




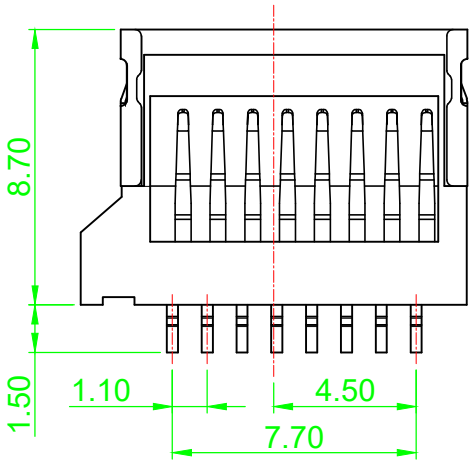


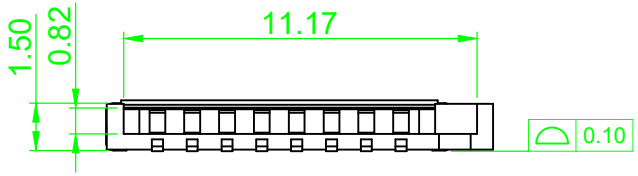


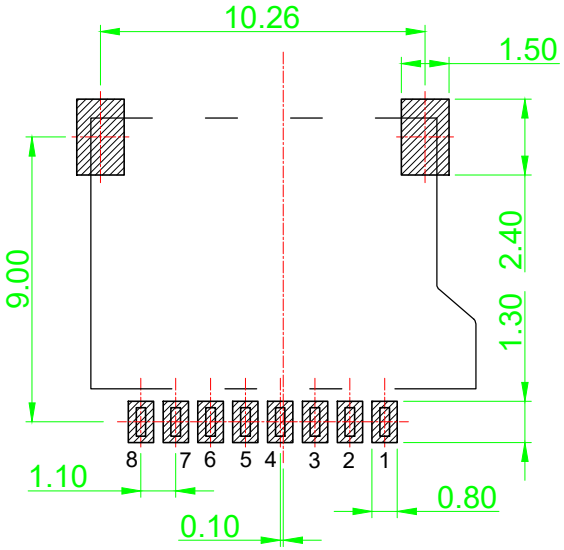

PCB LAYOUT (MOUNTING SIDE)
TOLERANCES:±0.05

NOTES:
1.MATERIAL:
HOUSING: LCP, UL94V-0, BLACK
CONTACT: COPPER ALLOY, T=0.15mm
SHELL: STAINLESS STEEL, T=0.20mm
2.FINISH:
CONTACT:
CONTACT AREA: SELECTED GOLD PLATED
SOLDER AREA: TIN PLATED
UNDER PLATING: NICKEL PLATED
SHELL:
SOLDER AREA: G/F GOLD PLATED
UNDER PLATING: NICKEL PLATED
3.SPECIFICATION:
CURRENT RATING: 0.5A / (1PIN)
VOLTAGE RATING: 10V AC/DC
DIELECTRIC WITHSTANDING: 500V AC FOR 1 MINUTE
CONTACT RESISTANCE: 100mΩ MAX.
INSULATION RESISTANCE: 1000MΩ MIN.
OPERATING TEMPERATURE: -25°C ~ +80°C
DURABILITY: 10000 CYCLES MIN.
CONTACT RETENTION: 2.5N MIN.
INSERTION FORCE: 9.8N MAX.
WITHDRAWAL FORCE: 2N

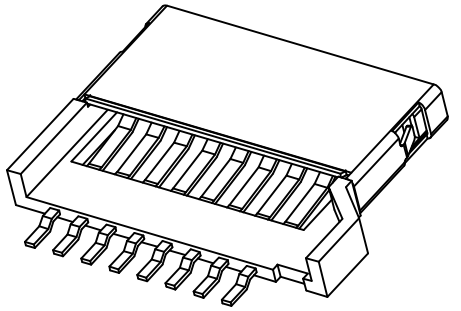




T-FLASH CARD

PIN NO.	NAME
1	DAT2
2	CD/DAT3
3	CMD
4	VDD
5	CLK
6	VSS
7	DAT0
8	DAT1

研騰國際企業股份有限公司
YANNIS ELECTRONICS CO.,LTD.

PROJECTION:	UNIT: mm	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 1 OF 2	REV.: A	NAME	Micro SD Push-Pull Type Short Profile H:1.5mm	
	SCALE: Free		CHECKED	Sunny					
			DRAWN	Juno	DATE: 2021/05/20		PART NO.	MSD-0109001	DWG NO. MSD-0109001_01

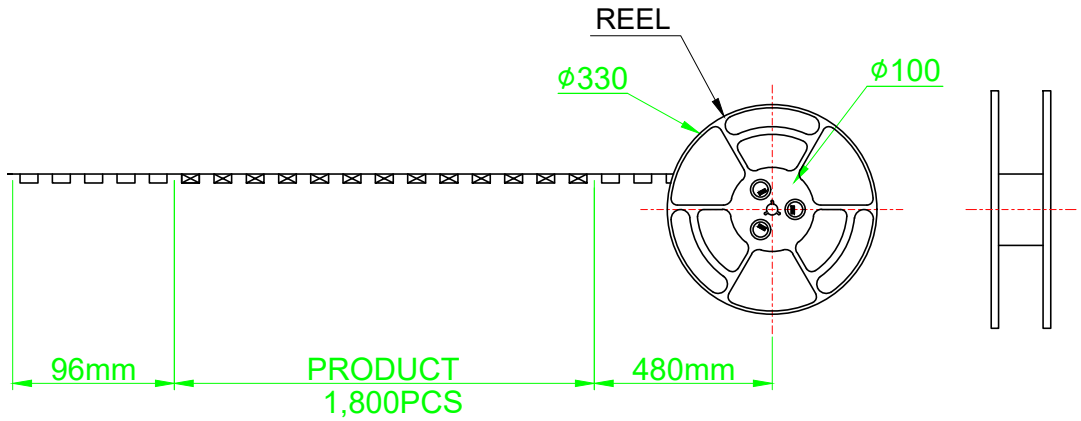


NOTES:


1.PACKING: 1,800 PCS/REEL, 10 REEL/BAG,
18,000 PCS/OUTER CARTON

2.MATERIAL: CARRIER TAPE: PS BLACK
COVER TAPE: PET FILM
REEL: PLASTIC

3.PEEL STRENGTH OF COVER TAPE:
20~80g(PEEL SPEED 300mm/MINUTE)

4.G/W: 10.4 Kg , N/W: 3.3 Kg

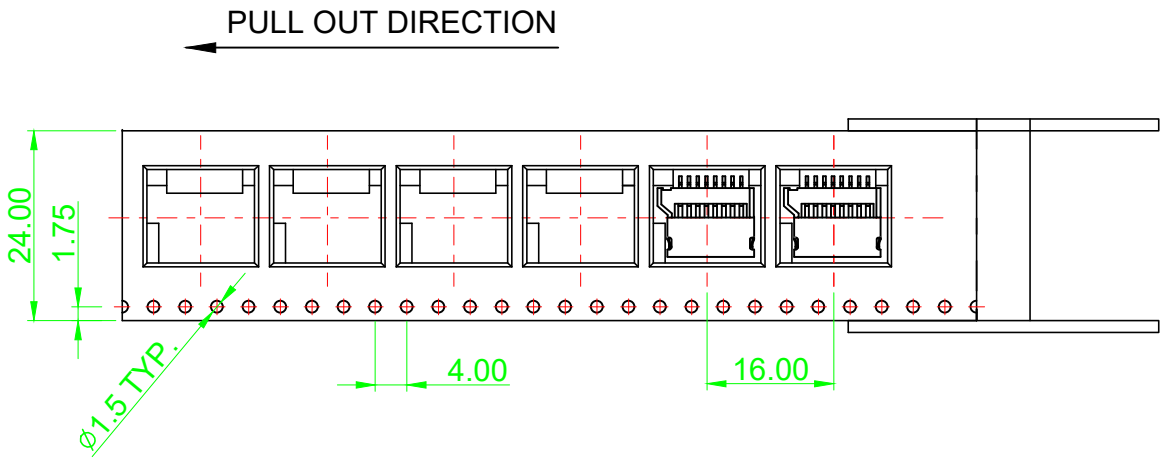

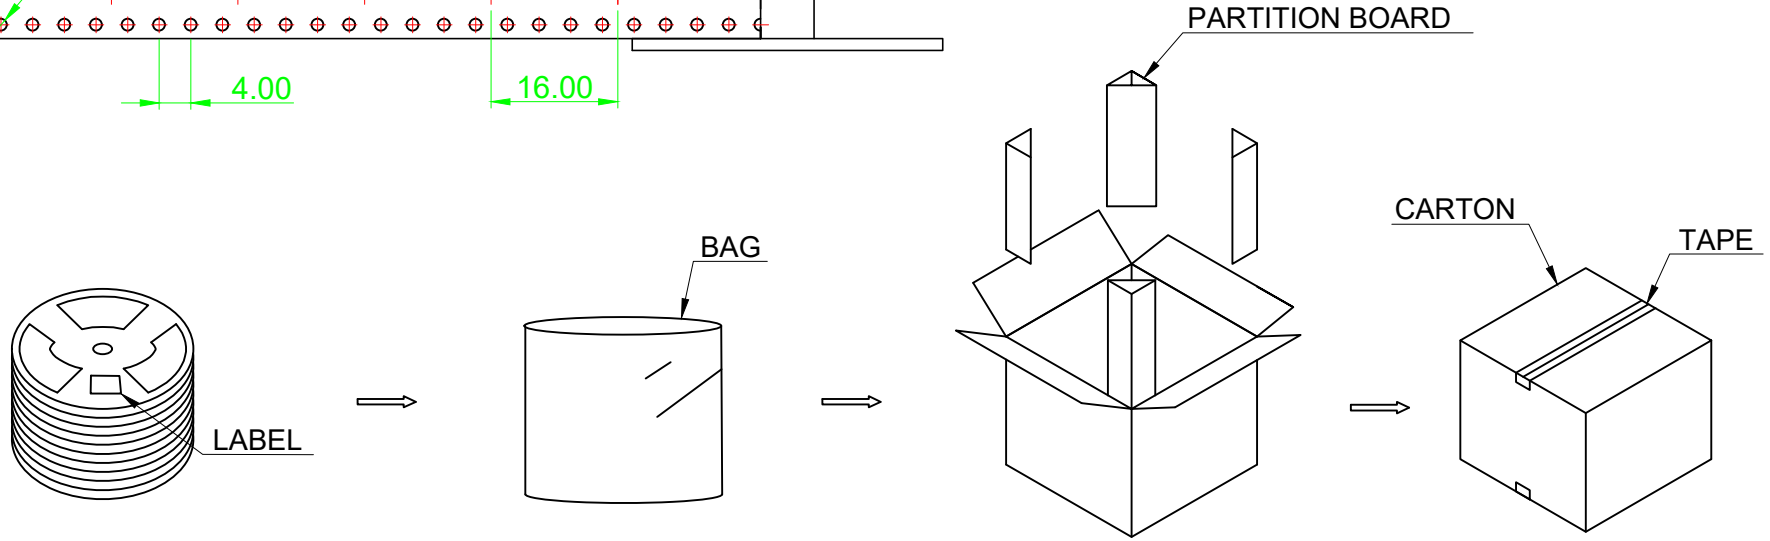

研騰國際企業股份有限公司 YANNIS ELECTRONICS CO.,LTD.	PROJECTION:	UNIT: mm SCALE: Free	GENERAL TOLERANCES: .X ±0.30 X°. ± 3° .XX ±0.20 .X° ± 1° .XXX ±0.10	APPROVED	David	SHEET: 2 OF 2	REV.: A	NAME	Micro SD Push-Pull Type Short Profile H:1.5mm Packing
				CHECKED	Sunny				
				DRAWN	Juno	DATE: 2021/05/20		PART NO.	MSD-0109001 DWG NO. MSD-0109001_01